

Dimensions and technical information without obligation. Subject to change.



Features

- Dual motors
- Auto reverse cutter protection
- Easy maintenance
- Reliable & durable construction
- Low speed – low maintenance
- High throughput sized material
- Suitable for secure documents, e-waste, medical waste & hard plastics
- Generous loading aperture

Optional Extras

- Multiple blade variations
- Custom hopper designs
- In-feed and out feed conveyors
- Elevated work and loading platforms

FS 8040 FS 8060 FS 8080

Dimensions

Height (A) (mm)	2 065	2 065	2 065
Length (B) (mm)	1 940	2 130	2 360
Width (C) (mm)	1 200	1 200	1 200
Approx Weight (T)	1.6	1.8	2

Cutting Chamber





Length (D) (mm)	800	800	800
Width (E) (mm)	400	600	800
Screen Mesh ø (mm)	15	25	25
Main Blade ø (mm)	245		
No. of cutters	20	30	42
Blade thickness (mm)	18.5	18.5	18.5

Power

Power supply	3 phase		
Motor	2 x 11 kw		
Main shaft rev (rpm)	16-25	16-25	12-25

[More product info on our website >>](#)

Dimensions and technical information without obligation. Subject to change.

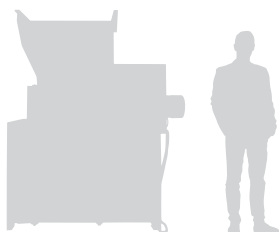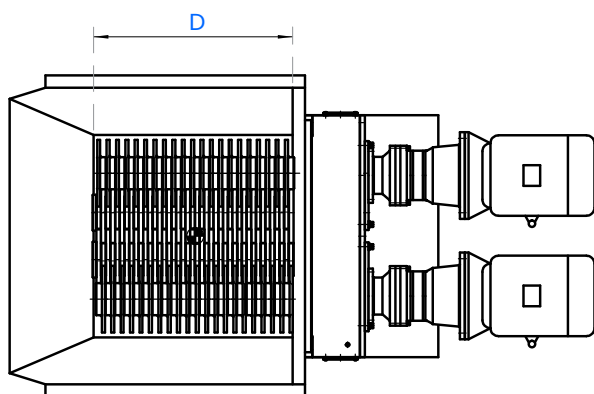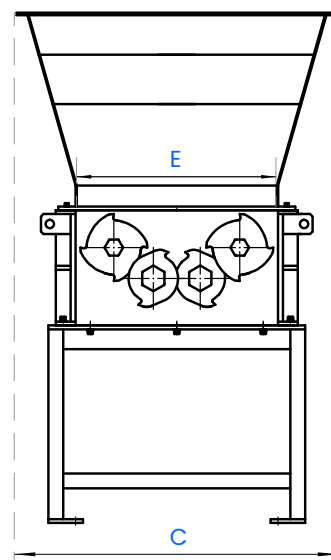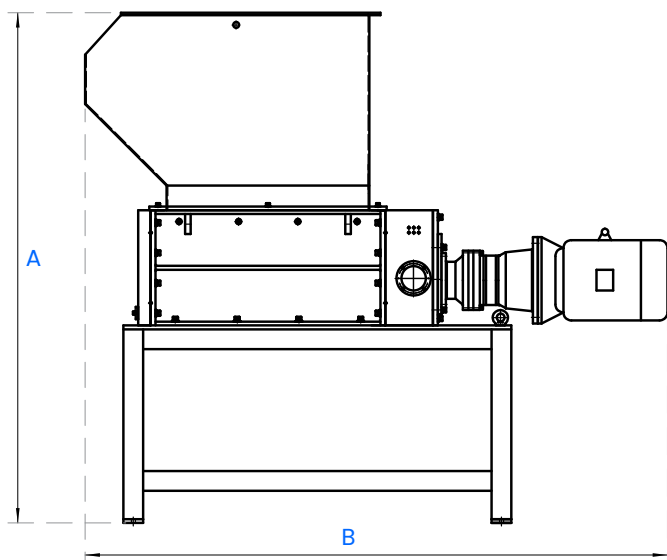

Size Comparison



Shaft Type
4 Shaft Shredder



Cutters
20-42
(18.5 mm thick)



Motors
2 x 11 kW



Waste Types
Hazardous, Secure,
E-waste, Tyres, Hard
plastics

