


The VER123M Mobile Picking Station offers extended length and increased picking capacity for higher throughput applications.

Designed for greater material flow and additional operator positions, it delivers scalable mobile separation with enhanced recovery performance.

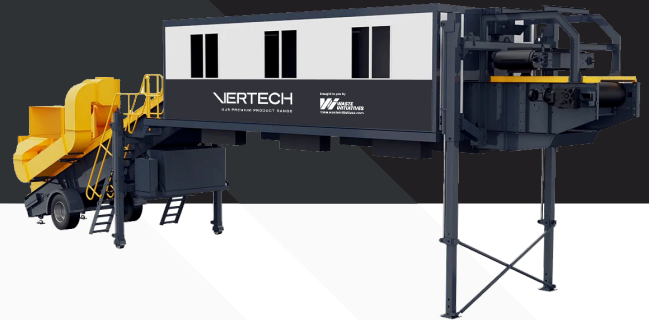


Features

- 3 picking bays with 6 discharge chutes
- 1200 mm picking belt width
- On-board 44 kVA generator including fuel pump
- Air knife blower system for light material separation
- Overband magnet for ferrous metal removal
- Telescopic legs for skip access
- Hydraulic controls for rapid setup
- Air-conditioned cabin with anti-slip flooring, heating and lighting
- Emergency stops and pull cords in cabin
- Wheeled axle and fifth wheel coupling
- Engine bay access from ground level
- Robust steel construction



Options

- Suction or blowing fan system positioning
- Overband magnet positioning
- Air conditioning upgrade
- Plain or chevron belt



Picking Bays
3 Bays,
6 Materials



Motor
44 (kVA)



Waste Types
C&D, C&I,
Municipal,
Commingled,
FOGO

DIMENSIONS		MODEL VER123M
Transport Width (mm)		3,490
Transport Length (mm)		19,100
Transport Height (mm)		3,455
Working Width (mm)		3,490
Working Length (mm)		18,750
Working Height (mm)		5,560
Dry Weight (kg)		15,800
PICKING BAYS		
No. of Bays		3
Capacity		up to 6 Products
BELT		
Width		1200 mm
Speed		Variable Speed Control (VSC)
POWER		
Power Options		Diesel generator / Plug-in Electric
Diesel Generator		Kubota 44 kVA
OPTIONS		
Belt		Plain or Chevron Belt
Fan Type		Suction or Blowing
Overbelt Magnet		before or after picking
Air Conditioning		Yes